



NU125 AIR EXCHANGER PRODUCT INFORMATION SHEET

CABINET: The case is constructed of 0.032 painted aluminum with a white enamel finish. The cabinet is fully insulated.

BLOWERS: backward curve impeller using PSC motors and permanently sealed bearings.

ADDITIONAL FEATURES:


- Remote dehumidistat
- Built in variable speed control
- Connections for mechanical timer
- Optional internal dehumidistat
- Drain and hanger kit included
- Polyester supply air filter included

AIR FLOW	121 cfm / 57 l/s
DUCT SIZE	5" Ø / 125 mm Ø
CABINET SIZE	16x10x10 in
(L x H x D)	406x254x254 mm
WATTS	90
VOLTS	115

CERTIFICATION: CSA C22.2

WARRANTY:

Subject to applicable consumer protection legislation Nu-Air Ventilation Systems Inc. warrants that the unit will be free from defective materials and workmanship for a period of three (3) years provided installation is in accordance with the instructions.

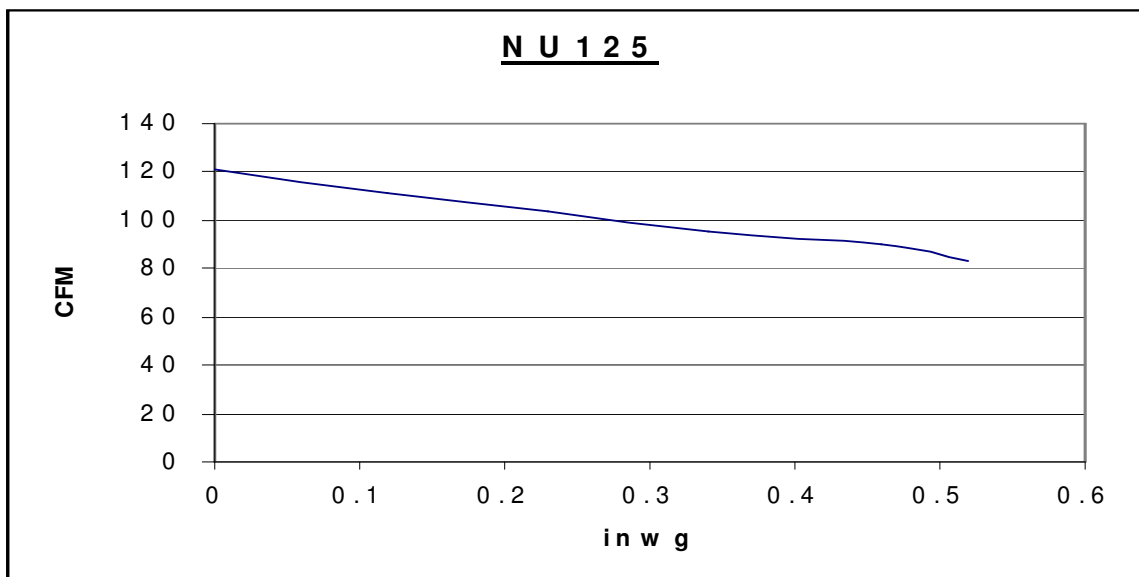

Note: Nu-Air reserves the right to change specifications without notice.

Revised Nov. 23rd, 2007

